


Datatoys Aluminum Pro Mount

DT-MNT-PRO

Use and Care of your Aluminum Pro Mount

The **Aluminum Pro Mount** is used in combination with either a portable or permanent mount that has a standard $\frac{1}{4}$ " x 20 mounting screw for the **Aluminum Pro Mount** to fasten to.

The **Aluminum Pro Mount** is ideal for eliminating vibration that a typical rear bullet camera mount can create. Clamping around the center of the bullet camera distributes the weight and reduces leverage, therefore, minimizing vibration. Included is a urethane adhesive strip to protect your bullet camera from any scratches and to act as an additional vibration dampener. This urethane is to be wrapped around the center of your bullet camera prior to inserting in the **Aluminum Pro Mount**.

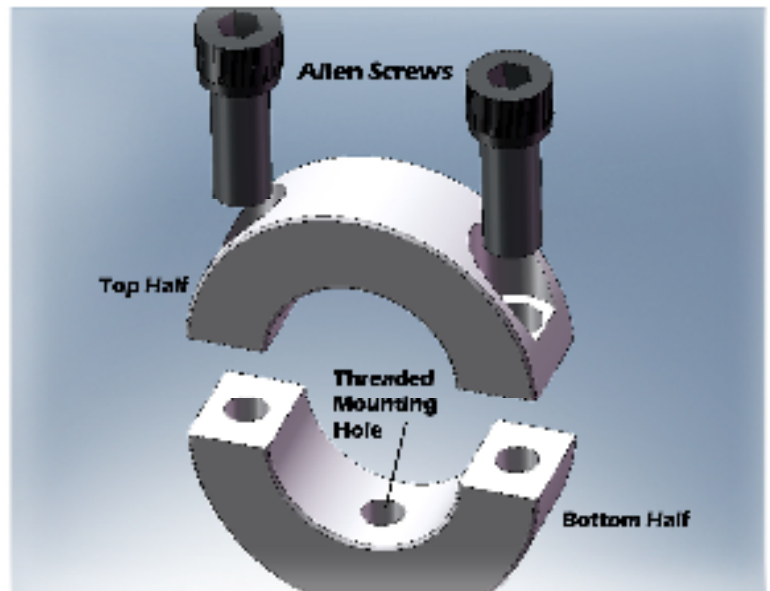

Included with the **Aluminum Pro Mount** are two sets of Allen screws and the correct Allen wrench for tightening and loosening. The black screws are oxidized and the silver screws are stainless steel.

Aluminum Pro Mount Operation



1. Determine the center of the bullet camera
2. Place the rubber around the camera in the center
3. Put the top and bottom halves together and start to thread the screws only one to two turns.
4. Insert the bullet camera to the half-way point and align the camera in approximate direction you wish it to view.
5. Use the Allen wrench provided to tighten the Allen screws but do not tighten fully until you are happy with the direction the camera is pointed

Special Notes on Care

The **Aluminum Pro Mount** is made from high strength aluminum and is then powder coated so special care is limited. The Allen screws must be kept clean and well lubricated to promote smooth operation in any environments, and to protect against corrosion. If it becomes necessary to lubricate the threads, use high quality oil or grease only. For permanent installations thread locker may be used.

Proudly made in the USA
www.datatoys.com